

The smallest **IP68** protected  
junction box available on the market.

*Paguro*<sup>®</sup>



## Junction box IP68 "Paguro®"


For round cables type  
H05RN-F, H07RN-F, FG7OR, FROR

Code 5625/415/8 - Ø min 6,5 - Ø max 8  
Code 5625/415/12 - Ø min 9,5 - Ø max 12

### TECHNICAL DETAILS


- Connection 4x1,5 mm<sup>2</sup>
- Rated voltage 250-380V

Supplied with self threading screws 005625/41682;  
Ø 4,2x16 mm  
Terminal block 4x1,5 mm<sup>2</sup> 005625/41530


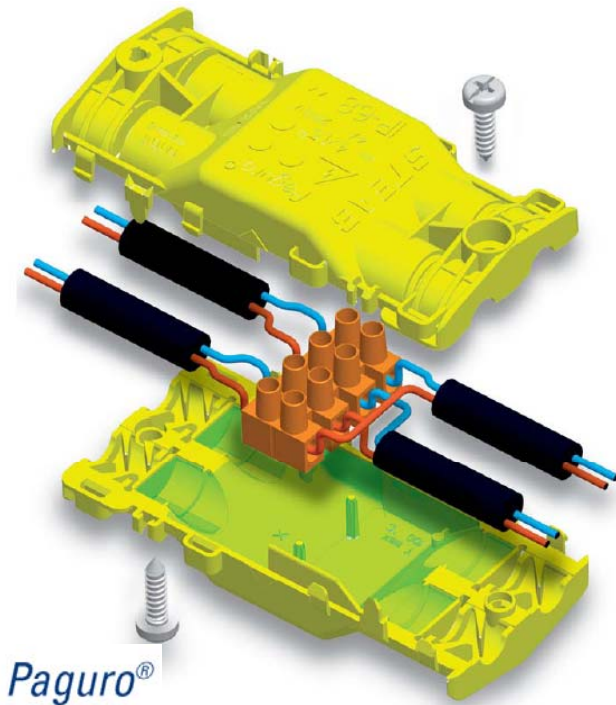


Paguro®


3 LED spotlights serial connected with driver

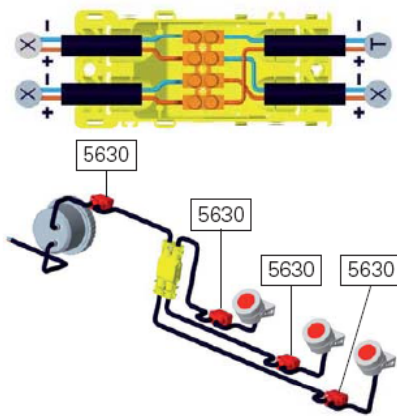

3 LED RGB spotlights (cable with 4conductors) parallel connected to RGB station controller

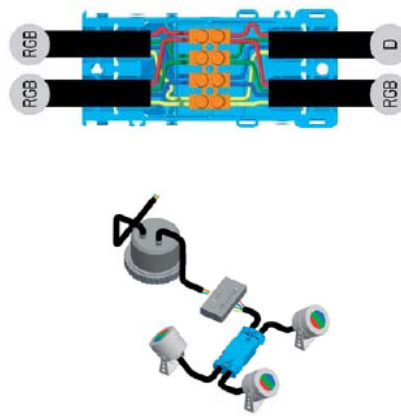

Materiale / Material  
6 Nylon 66 RV



Materiale / Material  
6 Nylon 66 RV

Codice / Code	Dimensioni / Dimensions (mm)				Colore / Colour	
	A	B	C	D	6	9
5625/415/8	95	45	24	8	Materiale / Material →	6
5625/415/12	95	45	24	12	6	

Codice / Code	Dimensioni / Dimensions (mm)				Colore / Colour	
	A	B	C	E	0	6
005625/41530	29,6	15,2	15,3	8	Materiale / Material →	6